


- roughing-in set for urinal
- for manual actuation or Trectroninfra-red electronic 6 V
- water group with stop valve
- flow pressure min 0,5 bar
- operating pressure max 10 bar
- flush aid
- functional unit checked ex factory
- water supply connections ½" outer threat
- installation box with gasket
- fixing points for dry cladding and masonry-in

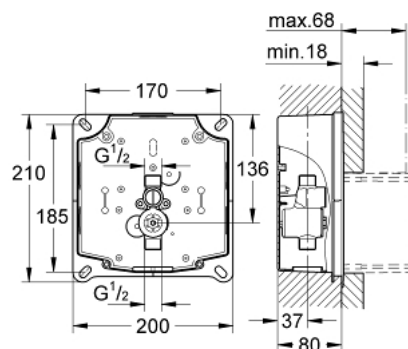

38 787 000 **GROHE RAPIDO UMB**

SPARE PARTS, กันยายน 2006 – now

1: Isolating valve (Order-nr. 43392000)

2: Inspection shaft (Order-nr. 66838000)

